


## Verschleißbleiste, vergütet auf ca. 470-530 HB

Flat, heat treated at 470-530 HB

Zugfestigkeit (RM): 1690 N/mm<sup>2</sup>  
Streckgrenze (Re): 1340 N/mm<sup>2</sup>  
Schlagfestigkeit (-20°C): 29 Joule

Tensile strength (RM): 1690 N/mm<sup>2</sup>  
Yield point (Re): 1340 N/mm<sup>2</sup>  
Elongation (-20°C): 29 Joule

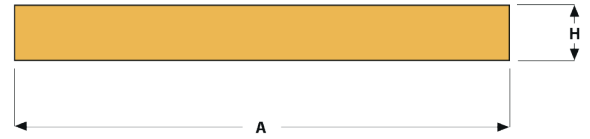

A (mm)	H (mm)	Gewicht (kg/m) <i>Weight</i>	Länge (mm) <i>Length</i>
60	8	3,8	6000
60	10	4,8	6000
80	10	6,3	6000
80	12	8,0	6000
80	15	9,4	6000
100	10	7,8	6000
100	12	9,6	6000
100	15	11,7	6000
100	20	16,0	6000
120	15	14,4	6000
120	20	19,2	6000
150	15	18,0	6000
150	20	24,0	6000
200	20	32,0	6000

Auch in 3000mm erhältlich | also available in 3000mm length