


## Gabelzahn

Bolt-on Tooth

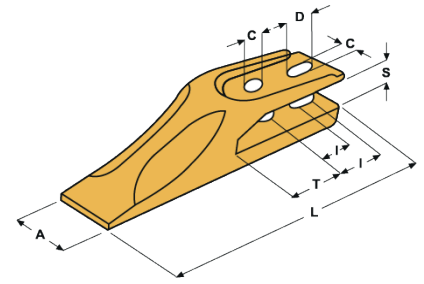

Anwendung Application	Artikel-Nr. Part-no.	L	A	T	I	S	C/D	Gewicht (kg) Weight	Schraube Bolt	Mutter Nut
allgemein	GZ-190/40-45	190	50	37	40-45	17	13	1,4	12x45-931	M 12-934
allgemein	GZ-222/50	222	53	48	50	22	15	1,7	14x45-931	M 14-934
J C B	53103205	250	53	55	44,5	21	20,5	2,5	3/4"x2.1/2"	3/4"
Fiat Allis	8282253 79041073	270	50	65	65	22	13	3,3	12x65-931	M 12-934
FKJ /Komatsu	312204054	285	50	51	80	22	18	3,6	5/8"x2.1/2"	5/8"
Komatsu	GZ-370/100	370	80	75	100	32	17	6,0	16x70-931	M 16-934
Hanomag	2938780M1 2983340M1	380	80	75	110	26	17	4,9	16x70-931	M-16-934
Hanomag	3230271M1 2952086M1 2983341M1	420	90	90	135	32	17	8,5	16x80-931	M 16-934
Hanomag	4210290M1	420	90	90	135	37	17	8,5	16x80-931	M 16-934
Hanomag	2949448M1 2983342M1	500	105	115	160	38	25	16,0	24x100-931	M 24-934
Hanomag	4200599M1	500	105	115	160	42	25	16,0	24x100-931	M 24-934
Drago	GAZ 5-8	275	70	69	72	21	17	3,3	16x60-931	M 16-934
Kubota	68131-6691-2	220	40	35	55	17	17	2,0	14x45-931 14x45-931	Riegel o. M14-934
Hitachi	X305-6107	190	40	22	55	13	14	1,6	12x50-931	M 12-934
Caterpillar	6Y 6335 9W 1879	270	65	50	75	21	18	2,7	5/8"x2.1/2"	5/8"